


VENTOS

VENTOS FA External

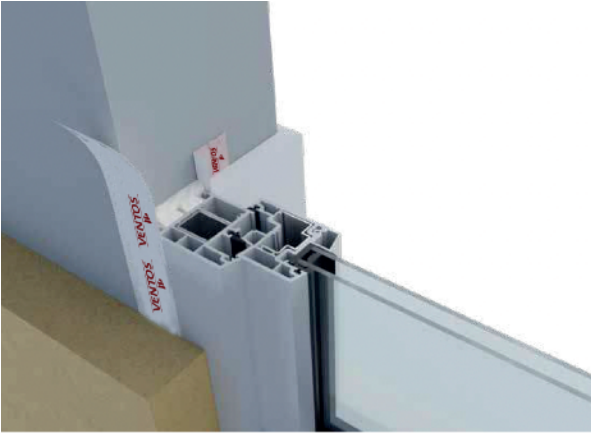

Advantages at a glance

- Sd value of 0.08 m
- Adhesive tape for outdoor use
- Full-surface adhesive coating

Properties:



Product description:

Fully adhesive tape for outdoor use. Due to the stretchability of the film, movements of the building structure are absorbed. Due to the full-surface adhesive coating, no additional adhesive is required.

Composition

1. Fleece in PES.PP
2. Acrylic adhesive with split silicone liner

VENTOS
II.

VENTOS FA External

Product Data Sheet		
Total weight	EN 1849-2	420 g/m ²
Weight adhesive	EN 1849-2	240 g/m ²
Thickness	EN 1849-2	0,62 mm
Tear strength MD/CD*	EN 12311-1	290 / 31 N/50mm
Elongation MD/CD*	EN 12311-1	19 / 130%
Max. permissible total deformation		5%
Air tightness	EN 1026	a _n ≤0,1
Water tightn. against driving rain	EN 1027	-
Resistance to water passage	EN 13984/EN 1928	W1 (Water column >2000 mm)
Sd value	EN 1931/EN 12572	0,08 m
Fire behaviour	EN ISO 11925-2	E
UV resistance		3 months
Temperature resistance		-40° /+80°C
Application temperature		-5° /+40°C
Storage location		dry and frost-free in original container
Storage time		max. 12 months

* MD = longitudinal CD = transverse

** Available on request also in widths: 300 mm, 350 mm and 400 mm

U Value does not assume any liability if the product is not used as prescribed.

Articles & Units				
Article	Width (mm)**	Length (m)	Pack (pcs)	Pallet (packs)
9960.10198	50	40	8	72
9960.10025	75	40	5	72
9960.10027	100	40	4	72
9960.10029	150	40	2	72
9960.10090	200	40	2	72
9960.8477	250	40	1	72

