



Product Name

VARIO XtraFix

This fixative strip is specially designed for use with ISOVER Vario XtraSafe variable membrane and enables the membrane to be repositioned as required. Assembly aid for secure installation of ISOVER Vario XtraSafe variable damp-proof membrane.

Part of the Vario range



VARIO XtraFix



BENEFITS AND FEATURES

ADHESIVE Modified solvent-free acrylate, water-resistant

FIRE Euroclass E (normally flammable) in accordance with DIN 13984.

EASY TO INSTALL The affixing function enables rapid and precise installation, since it is simply stuck to the underlying surface and the membrane attached over it.

ENVIRONMENTAL CREDENTIALS Free of solvents, isocyanates, PVC, heavy metals and halogens

TEMPERATURE (- 30°C to + 80°C.)

WORKING TEMPERATURE (-10 °C and above)

STANDARDS & CERTIFICATION

QUALITY We hold a Quality Management Standard BS EN ISO 9001: 2008 for manufacturing.


CE All products are manufactured in accordance with the CE marking requirements under the Construction Products Regulation,

PRODUCT STANDARDS All our products are manufactured in accordance with product standard: BS EN 13162: 2008 and BS EN 13172 Evaluation of Conformity.

ENVIRONMENT ISOVER is an ISO 14001:2004 (Environmental Management System) accredited manufacturing facility. This accreditation ensures that all products are manufactured to the stringent standards set out by this management system. EN ISO 13162 EMS 551706 003 BS EN ISO 9001: 2000



VARIO XtraFix Application

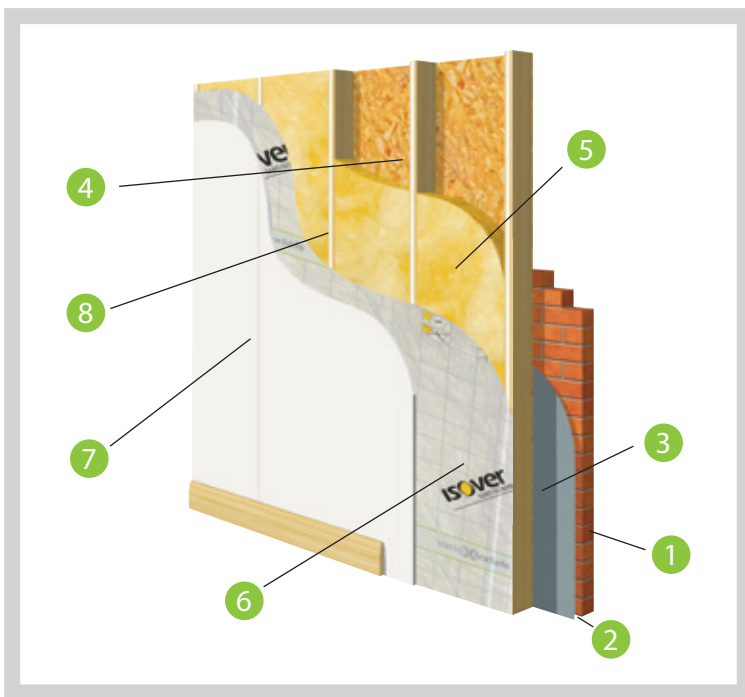

Timber Frame

Insulation between studs

- 1 External brick
- 2 Cavity
- 3 Breather membrane
- 4 Sheathing board
- 5 ISOVER insulation between studs
- 6 XtraSafe membrane
- 7 12.5mm Gyproc WallBoard
- 8 XtraFix Adhesive fixative tape

For more applications and
product details, please visit
www.isover.ie

Basic Installation Steps



1. Stick Vario XtraFix on a firm surface
i.e. Timber Rafters. If necessary, affix
additionally at 20 cm gaps



2. Affix the Vario XtraSafe Intelligent membrane
against the Vario XtraFix. Lay subsequent
strips with a 10 cm overlap.

ISOVER Ireland
Unit 4, Kilcarbery Business Park,
Nangor Rd., Dublin 22
Tel: +353 (0) 1 629 8400
Email: info@isover.ie
Web: www.isover.ie

ISOVER Technical Team
ROI Free Phone: 1800 744 480
NI Phone: 0845 399 0159
Email: tech.ie@saint-gobain.com